

ShowerTablet Select

Bath thermostat 700 for exposed installation

Surfaces: **White/Chrome** Article Number: **13183400**



Description

product features

- projection 192 mm
- 2 functions
- simultaneous utilization by 2 outlets
- centre distance: 150 ± 18 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 15 l/min
- Select valve, thermostat cartridge
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40°C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- shelf made of safety glass
- surface of the shelf at color variant -000 = mirror glass, at color variant -400 = white glass
- connection type: G $\frac{1}{2}$
- connection dimension: DN15
- dirt filter included


Technology



Product image



Scale drawing

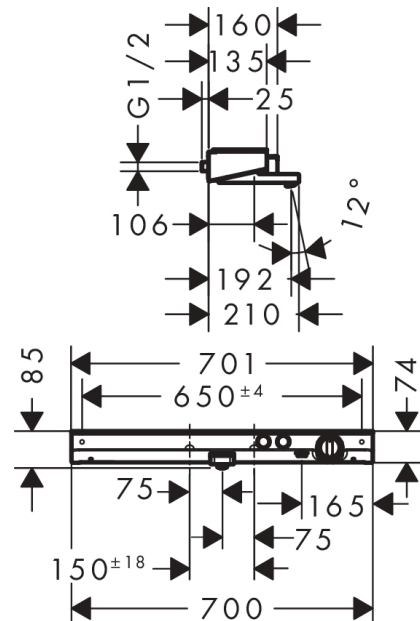

ShowerTablet Select
Bath thermostat 700 for exposed installation
 Surfaces: **White/Chrome** Article Number: **13183400**



Flowchart

